


46-80 CFM




Model	P/N	Bearing	Rating Voltage (VAC)	Freq. (Hz)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
DP201AT	2122HSL,GN	● Vapo	220-240	50/60	0,10/0,09	19/19	2000/2300	64/78	0,13/0,16	43/46	330
DP201AT	2122HST,GN	○ BALL	220-240	50/60	0,10/0,09	19/19	2000/2300	64/78	0,13/0,16	43/46	330
DP203AT	2122LSL,GN	○ Sleeve	220-240	50/60	0,07/0,07	14/13	1600/1800	46/53	0,11/0,12	35/38	330
DP203AT	2122LST,GN	○ BALL	220-240	50/60	0,07/0,07	14/13	1600/1800	46/53	0,11/0,12	35/38	330
DP201AT	2122HBL,GN	○ BALL	220-240	50/60	0,10/0,09	19/18	2150/2500	66/80	0,14/0,17	44/48	330
DP201AT	2122HBT,GN	○ Sleeve	220-240	50/60	0,10/0,09	19/18	2150/2500	66/80	0,14/0,17	44/48	330
DP203AT	2122LBL,GN	○ BALL	220-240	50/60	0,07/0,07	14/13	1700/1900	47/54	0,12/0,13	37/40	330
DP203AT	2122LBT,GN	○ Sleeve	220-240	50/60	0,07/0,07	14/13	1700/1900	47/54	0,12/0,13	37/40	330

Frame : Aluminum alloy

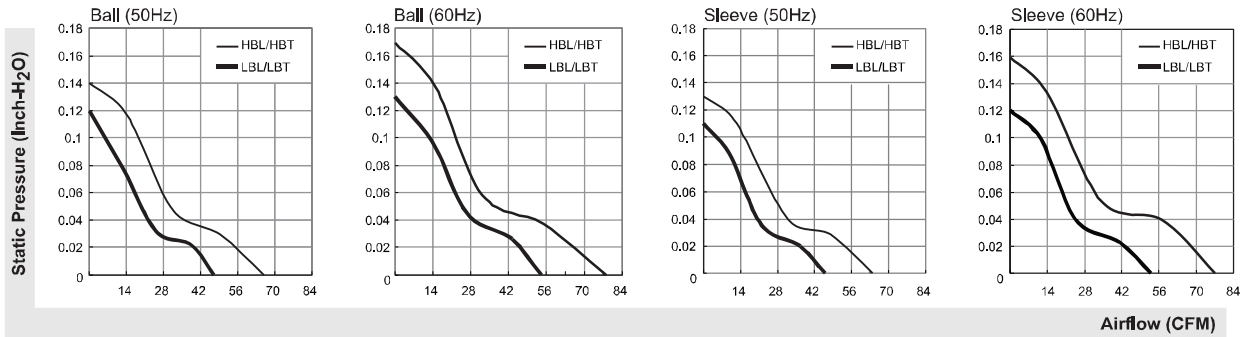

UNITS:mm

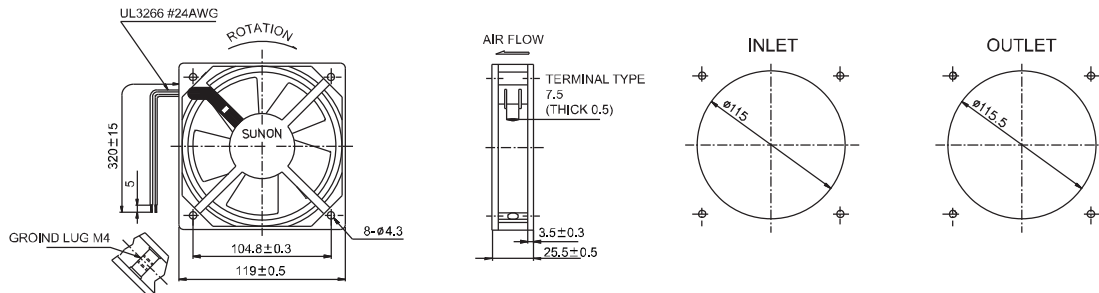

*All model could be customized on voltage or any other requirements to fit your need.


*Specifications subject to change without notice. Please Visit SUNON web site at <http://www.sunon.com> for update information.

46-80 CFM




Model	P/N	Bearing ● VAPO ○ BALL ◎ Sleeve	Rating Voltage (VAC)	Freq. (Hz)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
SP101AT	1122HSL,GN	◎	115	50/60	0,21/0,19	19/18	2000/2300	64/78	0,13/0,16	43/46	330
SP101AT	1122HST,GN	◎	115	50/60	0,21/0,19	19/18	2000/2300	64/78	0,13/0,16	43/46	330
SP103AT	1122LSL,GN	◎	115	50/60	0,14/0,13	14/13	1600/1800	46/53	0,11/0,12	35/38	330
SP103AT	1122LST,GN	◎	115	50/60	0,14/0,13	14/13	1600/1800	46/53	0,11/0,12	35/38	330
SP101AT	1122HBL,GN	○	115	50/60	0,21/0,19	19/18	2150/2500	66/80	0,14/0,17	44/48	330
SP101AT	1122HBT,GN	○	115	50/60	0,21/0,19	19/18	2150/2500	66/80	0,14/0,17	44/48	330
SP103AT	1122LBL,GN	○	115	50/60	0,12/0,11	12,5/11,5	1700/1900	47/54	0,12/0,13	37/40	330
SP103AT	1122LBT,GN	○	115	50/60	0,12/0,11	12,5/11,5	1700/1900	47/54	0,12/0,13	37/40	330

Frame : Aluminum alloy

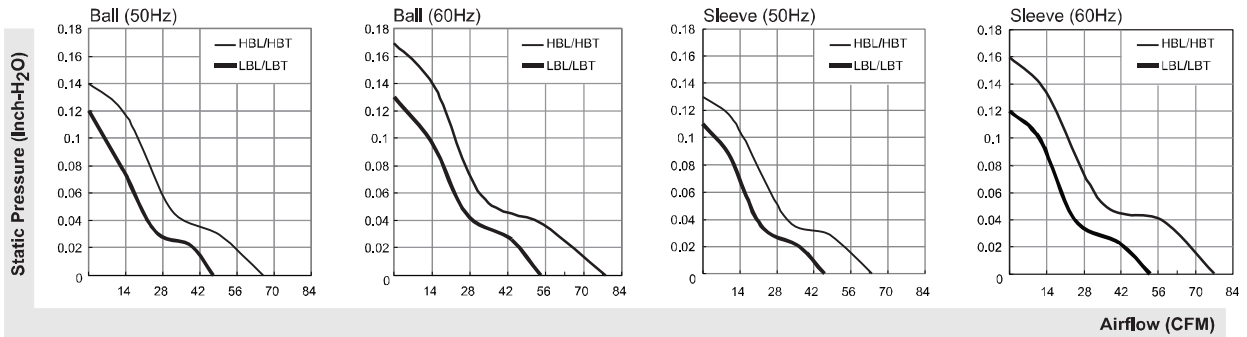

UNITS:mm

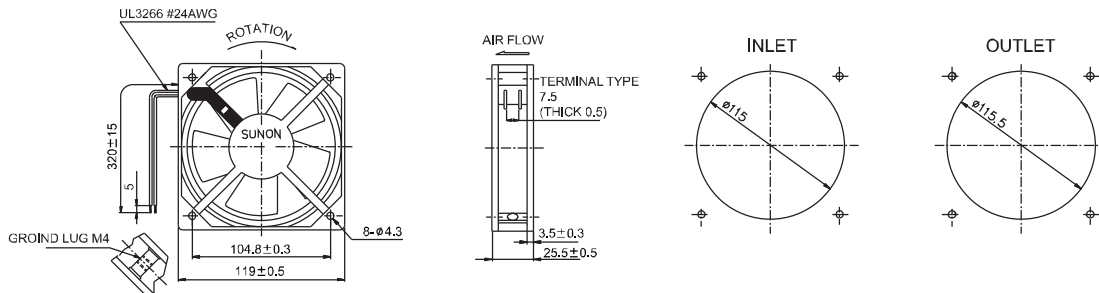

*All model could be customized on voltage or any other requirements to fit your need.

*Specifications subject to change without notice. Please Visit SUNON web site at <http://www.sunon.com> for update information.