


Skeleton AC Fan
80~110CFM



Model	P/N	Bearing	Rating Voltage (VAC)	Freq. (Hz)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
SP100-4F	1123XSL.GN	● Vapo ○ BALL ◎ Sleeve	115	50/60	0.26/0.24	22/20	2600/3000	92/110	0.32/0.36	43/48	435
SP100-4F	1123XBL.GN	○ BALL	115	50/60	0.26/0.24	22/20	2600/3000	92/110	0.32/0.36	45/50	435
SP101-4F	1123HSL.GN	◎ Sleeve	115	50/60	0.21/0.18	20/18	2550/2900	80/105	0.25/0.32	39/45	435
SP101-4F	1123HBL.GN	○ BALL	115	50/60	0.21/0.18	20/18	2550/2900	80/105	0.25/0.32	41/47	435
DP200-4F	2123XSL.GN	◎ Sleeve	220/240	50/60	0.14/0.12	22/21	2600/3000	92/110	0.32/0.36	43/48	435
DP200-4F	2123XBL.GN	○ BALL	220/240	50/60	0.14/0.12	22/21	2600/3000	92/110	0.32/0.36	45/50	435
DP201-4F	2123HSL.GN	◎ Sleeve	220/240	50/60	0.125/0.11	20/19	2550/2900	80/105	0.25/0.32	39/45	435
DP201-4F	2123HBL.GN	○ BALL	220/240	50/60	0.125/0.11	20/19	2550/2900	80/105	0.25/0.32	41/47	435

Frame : Aluminum alloy

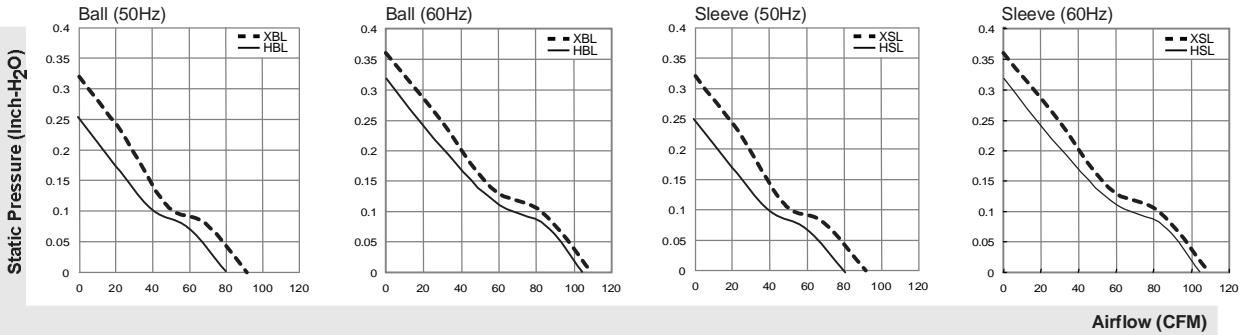

UNITS:mm

