HLG-240H Series



Phone: (800) 392-6318 | www.bravoelectro.com | sales@bravoelectro.com





• Built-in active PFC function

Features:

- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)




















HLG-240H-12 A Blank: IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.
- C: Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.
- D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION

MODEL	ATION	HLG-240H-12	HLG-240H-15	HLG-240H-20	HLG-240H-24	HLG-240H-30	HLG-240H-36	HLG-240H-42	HLG-240H-48	HLG-240H-54				
MODEL	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V				
	CONSTANT CURRENT REGION Note.4		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
	RATED CURRENT	16A	15A	12A	10A	8A	6.7A	5.72A	5A	4.45A				
	RATED CORRENT	192W	225W	240W	240W	240W	241.2W	240.24W	240W	240.3W				
	RIPPLE & NOISE (max.) Note.2	-		150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p				
	VOLTAGE ADJ. RANGE Note.6		150mVp-p 14 ~ 16V	18.6 ~ 21.4V	22.4 ~ 25.6V	28 ~ 32V	33.5 ~ 38.5V	39 ~ 45V	44.8 ~ 51.2V	50 ~ 57V				
ОИТРИТ	VOLIAGE ADJ. RANGE Note.6					20 ~ 32V	33.5 ~ 30.50	39~45V	44.0 ~ 51.20	30 ~ 37 V				
OUIFUI	CURRENT ADJ. RANGE	8 ~ 16A	7.5 ~ 15A	ootentiometer A	5 ~ 10A	4 ~ 8A	3.3 ~ 6.7A	2.86 ~ 5.72A	25 51	2.23 ~ 4.45A				
	VOLTACE TOLEDANCE Note 2		±2.0%	±1.0%		±1.0%	±1.0%	±1.0%		±1.0%				
	VOLTAGE TOLERANCE Note.3 LINE REGULATION	±0.5%	±0.5%	±0.5%	±1.0% ±0.5%	±0.5%	±0.5%	±0.5%	±1.0%	±0.5%				
		±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
						10.5%	10.5%	10.5%	10.5%	10.5%				
		2500ms, 80ms at full load 230VAC /115VAC												
	HOLD UP TIME (Typ.)													
		90 ~ 305VAC 127 ~ 431VDC 47 ~ 63Hz												
	FREQUENCY RANGE		40 DE: 0.05#	2001/40 16 111	LO	/ · "D - F								
	POWER FACTOR (Typ.)						actor Characte							
INPUT	EFFICIENCY (Typ.)	90%	90% 2A / 230V	92%	93% 277VAC	93%	93%	93%	93.5%	94%				
	AC CURRENT (Typ.)	4A / 115VAC												
	INRUSH CURRENT (Typ.)		75A/230VAC											
	LEAKAGE CURRENT	<0.75mA / 27	7VAC											
	OVER CURRENT Note.4	95~108%												
		Protection type : Constant current limiting, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed												
PROTECTION	OVER VOLTAGE	13.5 ~ 18V		23.5 ~ 27.5V		33 ~ 39V	43 ~ 49V	48 ~ 54V	55 ~ 63V	60 ~ 67V				
	OVER VOLIAGE	Protection type: Shut down and latch off o/p voltage, re-power on to recover												
	OVER TEMPERATURE	105°C ±5°C (TSW1) 95°C ±5°C (TSW1)												
	OVERTEMPERATURE	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down												
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")												
	WORKING HUMIDITY	20 ~ 95% RH non-condensing												
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,	10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/℃ (0	~50°C)											
	VIBRATION	10 ~ 500Hz, 5	G 12min./1cyc	ele, period for 7	72min. each ald	ong X, Y, Z axe	S							
	SAFETY STANDARDS Note.7	UL1012, CAN/CSA-C22.2 No. 107.1-01, UL8750, CSA C22.2 No. 250.0-08, TUV EN61347-1, EN61347-2-13 independent												
	SAFETT STANDARDS Note./	(except for HLG-240H C type), UL60950-1, UL8750, TUV EN60950-1, IP65 or IP67, J61347-1, J61347-2-13 approved												
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC												
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-F	G, O/P-FG:10	00M Ohms / 50	0VDC / 25°C /	70% RH								
	EMC EMISSION	Compliance to	EN55015, EN	155022 (CISPF	(22) Class B, E	N61000-3-2 C	lass C (≥50%	load) ; EN610	00-3-3					
	EMC IMMUNITY	Compliance to	EN61000-4-2	2,3,4,5,6,8,11, 1	EN61547, EN5	5024, light indu	ustry level (surg	ge 4KV), criter	ia A					
	MTBF	207.9K hrs mi	n. MIL-HDE	K-217F (25°C))									
OTHERS	DIMENSION	244.2*68*38.8mm (L*W*H)(HLG-240H-Blank/A/B) 251*68*38.8mm (L*W*H)(HLG-240H-C)												
	PACKING	1.3Kg; 12pcs/16.6Kg/0.84CUFT(HLG-240-Blank/A/B) 1.23Kg; 12pcs/15.8Kg/1.16CUFT(HLG-240-C)												
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12° twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance: includes set up tolerance, line regulation and load regulation. 4. Constant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design. 5. Derating may be needed under low input voltages. Please check the static characteristics for more details. 6. Type A and type C only. 7. Safety and EMC design refer to EN60598-1, subject 8750(UL), CNS15233, GB7000.1, FCC part18. 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.													




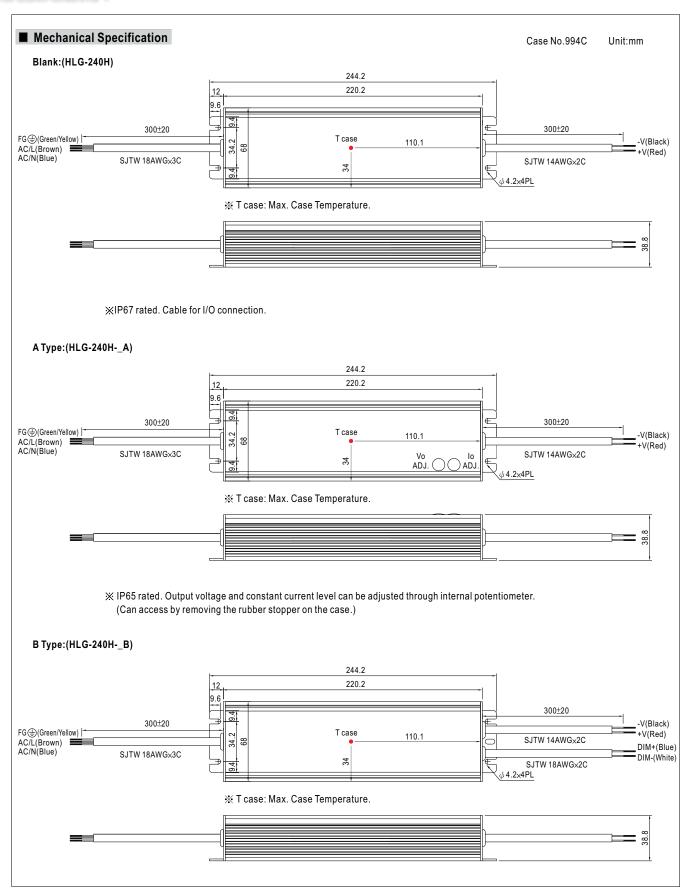




ELECTRO COMPONENT


Phone: (800) 392-6318 | www.bravoelectro.com | sales@bravoelectro.com

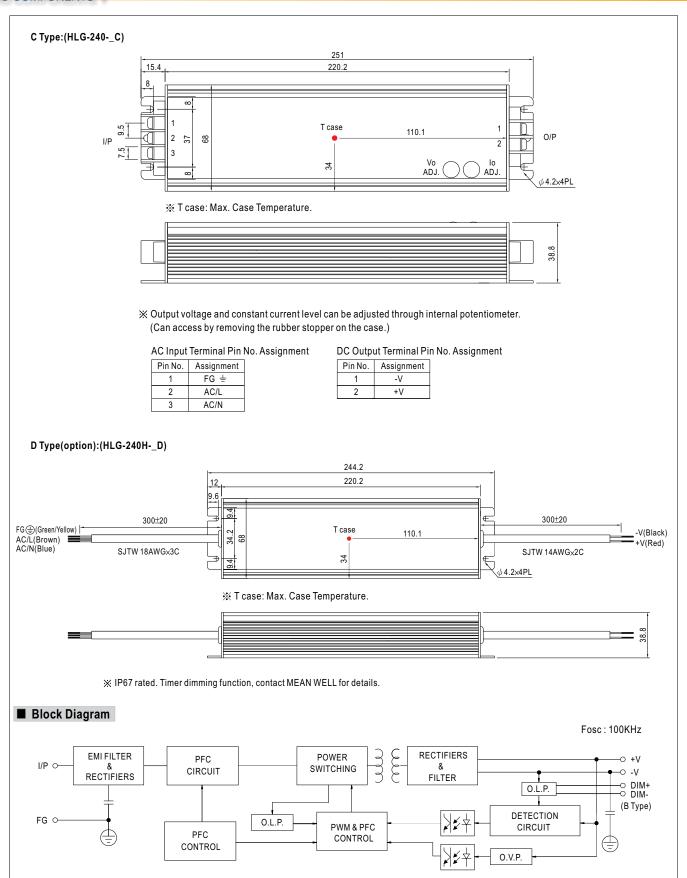



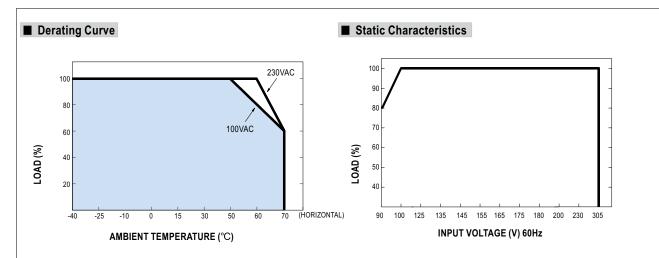


■ Power Factor Characteristic

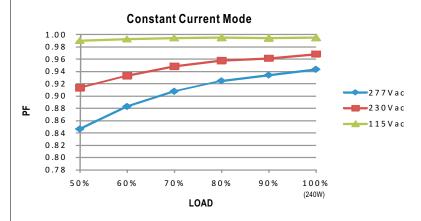

■ EFFICIENCY vs LOAD (48V Model)

 $HLG-240H\ series\ possess\ superior\ working\ efficiency\ that\ up\ to\ 93.5\%\ can\ be\ reached\ in\ field\ applications.$

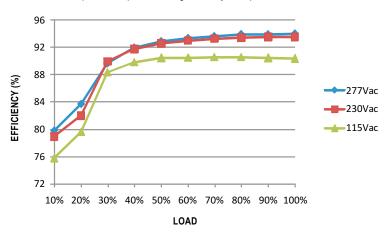




■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).



Typical LED power supply I-V curve

■ DIMMING OPERATION (for B-type only)



- ** Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or
 - 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10K Ω	20K Ω	30 Κ Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90ΚΩ	100K Ω	OPEN
value	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	
Percentage	of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


※ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

**Wsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

 $\not\! \times \text{Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.}$

Dimming connection diagram for turning the lighting fixture ON/OFF:

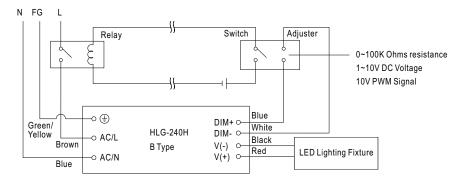

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



