

Phone: (800) 392-6318 | www.bravoelectro.com | sales@bravoelectro.com



Features:


- Universal AC input / Full range (up to 295VAC)
- Three-step analog dimming
- Built-in active PFC function
- Constant current design
- Protections: Short circuit / Over temperature
- Cooling by free air convection
- Fully isolated plastic case
- ullet Class ${\rm I\hspace{-.1em}I}$ power unit, no FG
- Suitable for indoor LED lighting applications
- 100% full load burn-in test
- No load power consumption < 0.5W
- Low cost
- High reliability
- 2 years warranty



SPECIFIC	ATION				W V V	SELV L c The	387		
MODEL		PLM-40-350	PLM-40-500	PLM-40-700	PLM-40-1050	PLM-40-1400	PLM-40-1750		
OUTPUT	RATED CURRENT	350mA	500mA	700mA	1050mA	1400mA	1750mA		
	OPERATING VOLTAGE RANGE Note.5	53 ~ 105V	40 ~ 80V	29 ~ 57V	19 ~ 38V	15 ~ 29V	12 ~ 23V		
	CURRENT ACCURACY Note.3	±5.0%							
	RATED POWER	36.75W	40W	38.5W	39.9W	40.6W	40.25W		
	RIPPLE & NOISE (max.) Note.2	10Vp-p	8Vp-p	6Vp-p	4Vp-p	3Vp-p	2.5Vp-p		
	NO LOAD OUTPUT VOLTAGE (max.)	115V	86V	63V	43V	34V	27V		
	SETUP TIME	500ms / 115VAC, 230VAC at full load							
INPUT	VOLTAGE RANGE Note.4	110 ~ 295VAC 156 ~ 416VDC							
	FREQUENCY RANGE	47 ~ 63Hz							
	POWER FACTOR (Typ.)	PF ≥ 0.97/115VAC,PF ≥ 0.95/230VAC,PF>0.9/277VAC(at full load)(Please refer to "Power Factor Characteristic" curve)							
	TOTAL HARMONIC DISTORTION	THD< 20% when output loading≧60% at 115VAC/230VAC input and output loading≧75% at 277VAC input							
	EFFICIENCY (Typ.)	88%	88%	87%	87%	86%	86%		
	AC CURRENT (Typ.)	0.5A/115VAC 0.3A/230VAC 0.25A/277VAC							
	INRUSH CURRENT(Typ.)	COLD START 15A(twidth=75µs measured at 50% Ipeak) at 230VAC							
	LEAKAGE CURRENT	<0.5mA / 240VAC							
PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.							
		115℃±5℃ (TSW1)							
	OVER TEMPERATURE	Protection type : Hic	automatically after te	mperature goes down	l.				
ENVIRONMENT	WORKING TEMP.	-30 ~ +45°C (Refer to "Derating Curve")							
	WORKING HUMIDITY	20 ~ 95% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)							
	VIBRATION	10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes							
SAFETY & EMC	SAFETY STANDARDS	UI8750, CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13, EN62384 approved							
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC							
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH							
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (≧50% load) ; EN61000-3-3							
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, light industry level, criteria A (Surge 2KV)							
OTHERS	MTBF	822.7Khrs min. MIL-HDBK-217F (25°C)							
	DIMENSION	175*42*24mm (L*W*H)							
	PACKING	0.175Kg; 60pcs/11.5kg/0.68CUFT							
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Please see "AC input voltage drop vs. output current characteristics" table. 4. Derating may be needed under low input voltage, please check the static characteristic for more details. 5. Constant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design. 6. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 7. Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.								




Phone: (800) 392-6318 | www.bravoelectro.com | sales@bravoelectro.com

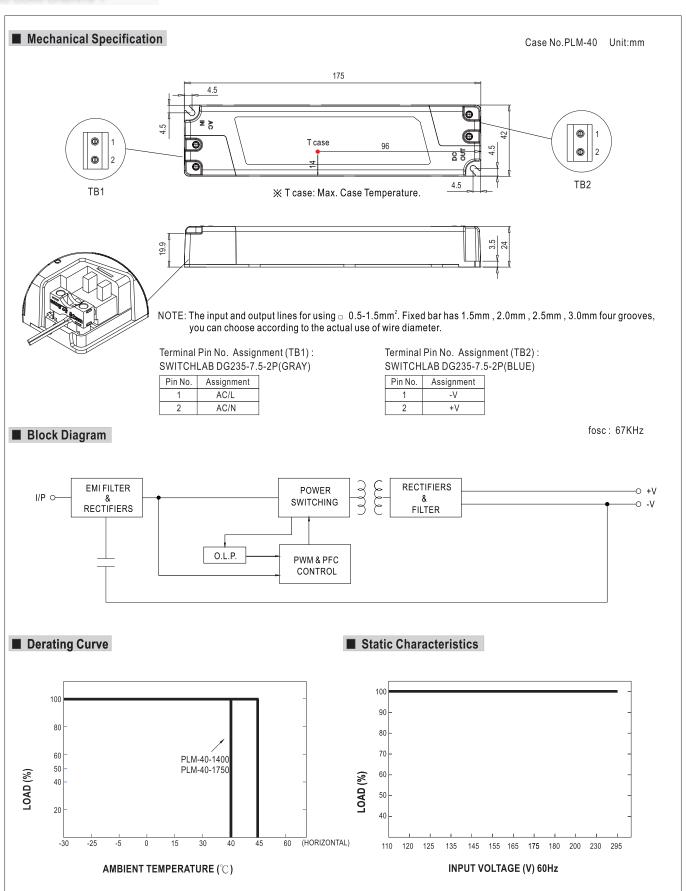




Phone: (800) 392-6318 | www.bravoelectro.com | sales@bravoelectro.com

■ Power Factor Characteristic

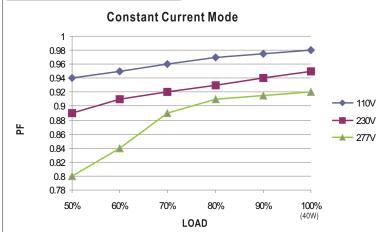

■ EFFICIENCY vs LOAD (PLM-40-350)


PLM-40 series possess superior working efficiency that up to 88% can be reached in field applications.

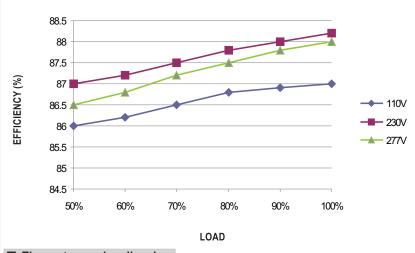

■ Three-step analog dimming

3-level analog dimming control using a wall switch

	STEP 1	STEP 2	STEP 3	
three-step analog dimming	Switch turn ON	Switch turn OFF Less than 2.5 seconds Switch turn ON	Switch turn OFF Less than 2.5 seconds Switch turn ON	
percentage of rated current	100%	40%	10%	



Switch OFF time is less than 2.5 seconds switch ON, Dimming repeated cycle diagram

 $NOTE: if the \ OFF \ time \ is \ longer \ than \ 2.5 \ seconds, once \ switch \ on \ again, PLM-40 \ will \ provide \ 100\% \ of \ rated \ output \ current$

■ AC input voltage drop vs. output current characteristics

AC input drop	10%	8%	5%	3%
lo drop	<18%	<13%	<8%	<6%

NOTE: Output current will return to the rated value within 50ms