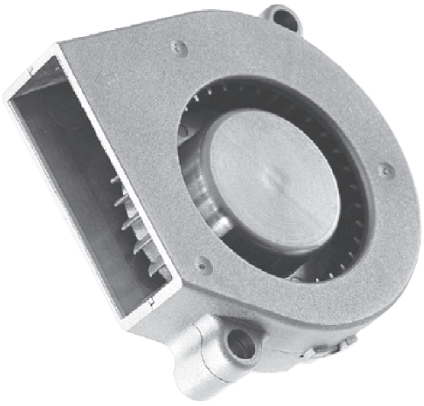

- Static Pressure: 8.9~24.1 mm-H2O
- Blade / Housing:
  Plastic Material UL 94-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 28 g
- Bearing Type: 2-Ball
- Function: 1,5& 6
- Voltage: 5, 12, 24 VDC

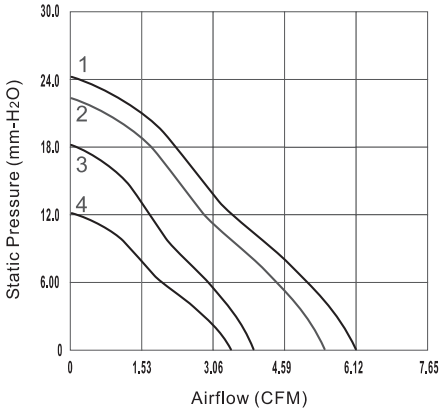

PERFORMANCE P-Q CURVE

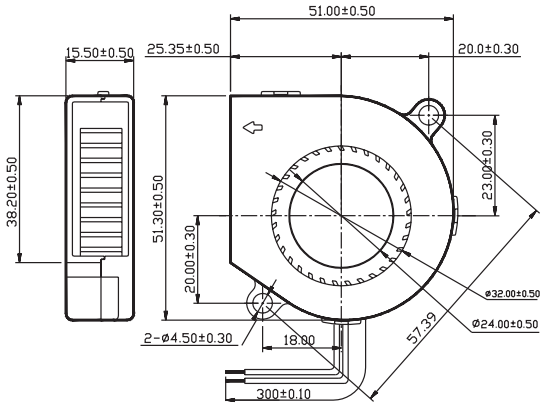

OUTLINE DIMENSIONS

Model No.	Rated Voltage (VDC)	Starting Voltage (VDC)	Operating Voltage Range (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H_2O)	Current (mA)	Power Consumption (W)	Life at 40°C (L10/Hour)	P-Q Curve	Noise Level (dB(A))
BW05015005BL	5	4	4~5.5	4500	3.3	8.9	170	0.85	80000	4	36.5
BW05015005BM	5	4	4~5.5	5500	4.1	13.4	310	1.55	80000	3	41.0
BW05015012BL	12	7	7~13.2	4500	3.3	8.9	80	0.96	80000	4	36.5
BW05015012BM	12	7	7~13.2	5500	4.1	13.4	125	1.50	80000	3	41.0
BW05015012BH	12	7	7~13.2	6500	4.8	19.5	210	2.52	80000	2	45.0
BW05015012BS	12	7	7~13.2	7800	6.1	24.1	300	3.60	75000	1	47.0
BW05015024BL	24	12	12~26.4	4500	3.3	8.9	65	1.56	80000	4	36.5
BW05015024BM	24	12	12~26.4	5500	4.1	13.4	90	2.16	80000	3	41.0
BW05015024BH	24	12	12~26.4	6500	4.8	19.5	130	3.12	80000	2	45.0