



AC

**UF12AM series**

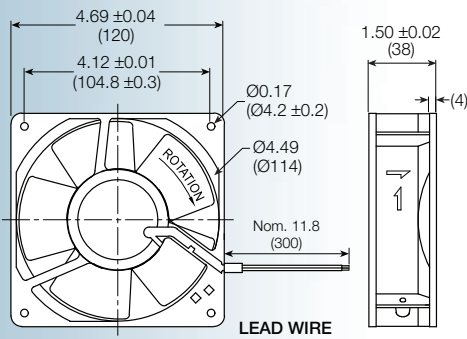

**Size: (120 x 120 x 38 mm)  
4.69 x 4.69 x 1.5 inches**

**Features:** *metal frame and impeller;  
Class F (155°) insulation;  
-40°C ~ 90°C operating  
temperature range;  
high-temp bearing lubricant*

**Operating voltage (VAC):** 115 or 230


**Bearing option:** motor quality ball bearings

**Motor:** shaded pole

**Air flow:** exhaust over struts

**Connection:** terminal or 22 AWG lead wire

**Protection:** impedance

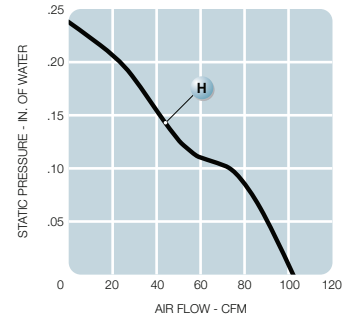

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max Static Pressure (H <sub>2</sub> O)		Sound Noise dB	Wt OZ
							M <sup>3</sup> /Min	CFM	MM	INCH		
UF12AM12-__H	115	60	13	0.15	0.22	3,100	2.9	103	6.0	0.24	46	19.4
UF12AM23-__H	230	60	15	0.09	0.12	3,100	2.9	103	6.0	0.24	46	19.4