



AC

UF16FC series

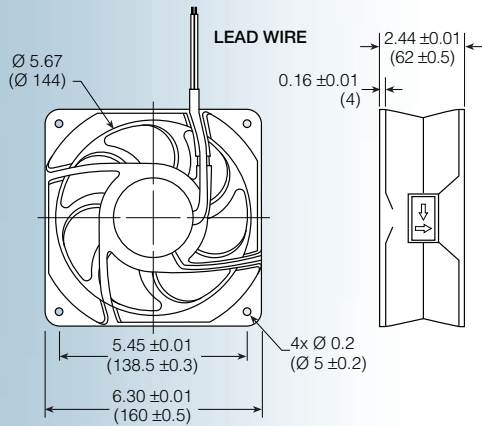

**Size: (160 x 160 x 62 mm)
6.30 x 6.30 x 2.44 inches**

Features: *high performance, capacitor start motor*

Operating voltage (VAC): 115 or 230

Construction: aluminum die cast frame; UL94V-0 PBT impeller


Bearing option: motor quality ball bearings

Motor: capacitor start

Air flow: exhaust over struts

Connection: terminal or 22 AWG lead wire

Protection: thermal



Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max Static Pressure (H ₂ O)		Sound Noise dB	Wt LBS
							M ³ /Min	CFM	MM	INCH		
UF16FC12-__H	115	60	41	0.34	0.79	3,400	7.5	265	18.2	0.72	64	3
UF16FC23-__H	230	60	41	0.17	0.79	3,400	7.5	265	18.2	0.72	64	3