


AC

UF60D series

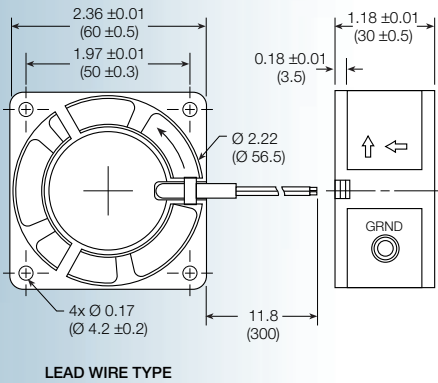

Size: (60 x 60 x 30 mm)
2.36 x 2.36 x 1.18 inches

Operating voltage (VAC): 115 or 230

Construction: aluminum die cast frame;
UL94V-0 PBT impeller


Bearing option: motor quality ball bearings

Motor: shaded pole

Air flow: exhaust over struts

Connection: 22 AWG lead wire

Protection: impedance

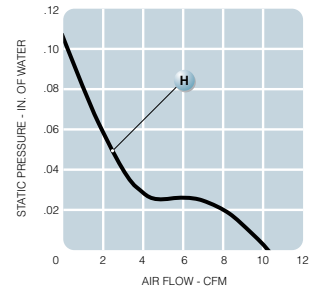

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max Static Pressure (H ₂ O)		Sound Noise dB	Wt OZ
							M ³ /Min	CFM	MM	INCH		
UF60D12-__H	115	60	4	0.035	0.040	3,100	0.29	10.2	2.8	0.11	28	4.9
UF60D23-__H	230	60	4	0.016	0.020	3,100	0.29	10.2	2.8	0.11	28	4.9