



## Features

- Constant Current mode output
- MEAN WELL patented circular metal housing with class I design (Patent No.: CN201220314551)
- Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming; DALI
- Typical lifetime > 50,000 hours
- 5 years warranty

## Applications

- LED bay lighting
- LED stage lighting
- LED spot lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## Description

HBG-100 series is a 100W AC/DC LED driver featuring the circular shape design. It operates from 90~305VAC and offers the constant current output models with different rated voltage between 24V and 60V. Thanks to the high efficiency up to 91.5%, with the fanless design, the entire series is able to operate for -40°C ~ +85°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HBG-100 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## Model Encoding

HBG - 100 - 36 A


- Function mode option
- Rated output voltage (24/36/48/60V)
- Rated wattage
- Series name

| Type  | IP Level | Function  | Note     |
|-------|----------|---|----------|
| Blank | IP67     | Io fixed.   | In Stock |
| A     | IP65     | Io adjustable through built-in potentiometer.                             | In Stock |
| B     | IP67     | 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)          | In Stock |
| AB    | IP65     | Io adjustable through built-in potentiometer with 3 in 1 dimming function | In Stock |
| DA    | IP67     | DALI control technology.  | In Stock |

## SPECIFICATION


| MODEL        |   | HBG-100-24  | HBG-100-36   | HBG-100-48 | HBG-100-60 |       |
|--------------|---|---|--|------------|------------|-------|
| OUTPUT       | RATED CURRENT                                 | 4A  | 2.7A   | 2A         | 1.6A       |       |
|              | RATED POWER                                   | 96W   | 97.2W  | 96W        | 96W        |       |
|              | CONSTANT CURRENT REGION <small>Note.2</small> | 14.4 ~ 24V  | 21.6 ~ 36V   | 28.8 ~ 48V | 36 ~ 60V   |       |
|              | OPEN CIRCUIT VOLTAGE(max.)                    | 25V   | 37V  | 49V        | 62V        |       |
|              | CURRENT ADJ. RANGE                            | Adjustable for A/AB-Type (via built-in potentiometer)   |  |            |            |       |
|              |   | 2.4 ~ 4A  | 1.62 ~ 2.7A  | 1.2 ~ 2A   | 1.0 ~ 1.6A |       |
|              | CURRENT RIPPLE                                | 5.0% max. @rated current  |  |            |            |       |
|              | CURRENT TOLERANCE                             | ±5.0%   |  |            |            |       |
| SETUP TIME   | <small>Note.4</small>                         | 2000ms / 115VAC    500ms / 230VAC   |  |            |            |       |
| INPUT        | VOLTAGE RANGE                                 | <small>Note.3</small>   | 90 ~ 305VAC    127 ~ 431VDC<br>(Please refer to "STATIC CHARACTERISTIC" section)   |            |            |       |
|              | FREQUENCY RANGE                               |   | 47 ~ 63Hz  |            |            |       |
|              | POWER FACTOR                                  |   | PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC@full load<br>(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)   |            |            |       |
|              | TOTAL HARMONIC DISTORTION                     |   | THD< 20%(@load≥60%/115VC,230VAC; @load≥75%/277VAC)<br>(Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)   |            |            |       |
|              | EFFICIENCY (Typ.)                             | <small>Note.5</small>   | 90.5%  | 91%        | 91%        | 91.5% |
|              | AC CURRENT (Typ.)                             |   | 1.1A / 115VAC    0.5A / 230VAC    0.45A / 277VAC   |            |            |       |
|              | INRUSH CURRENT (Typ.)                         |   | COLD START 60A(twidth=550μs measured at 50% Ipeak) at 230VAC; Per NEMA 410   |            |            |       |
|              | MAX. No. of PSUs on 16A CIRCUIT BREAKER       |   | 4 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 230VAC  |            |            |       |
|              | LEAKAGE CURRENT                               |   | <0.75mA / 277VAC   |            |            |       |
| PROTECTION   | OVER CURRENT                                  |   | 95 ~ 108%<br>Constant current limiting   |            |            |       |
|              | OVER VOLTAGE                                  |   | 28 ~ 35V    41 ~ 49V    54 ~ 63V    65 ~ 75V   |            |            |       |
|              |   |   | Shut down o/p voltage re-power on to recovery  |            |            |       |
|              | OVER TEMPERATURE                              |   | Shut down o/p voltage re-power on to recovery  |            |            |       |
| ENVIRONMENT  | WORKING TEMP.                                 |   | Tcase=-40 ~ +85℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)   |            |            |       |
|              | MAX. CASE TEMP.                               |   | Tcase=+85℃   |            |            |       |
|              | WORKING HUMIDITY                              |   | 20 ~ 95% RH non-condensing   |            |            |       |
|              | STORAGE TEMP., HUMIDITY                       |   | -40 ~ +80℃, 10 ~ 95% RH  |            |            |       |
|              | TEMP. COEFFICIENT                             |   | ±0.03%/℃ (0 ~ 50℃)   |            |            |       |
|              | VIBRATION                                     |   | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes  |            |            |       |
| SAFETY & EMC | SAFETY STANDARDS                              |   | UL8750(type"HL"),CSA C22.2 No.250.13-12, ENEC EN61347-1,EN61347-2-13 independent, EN62384;GB19510.1,GB19510.14, BIS IS15885(for 36A,48A,60A only), EAC TP TC 004,IP65 or IP67 approved |            |            |       |
|              | DALI STANDARDS                                |   | Compliance to IEC62386-101, 102, 207 for DA-Type only  |            |            |       |
|              | WITHSTAND VOLTAGE                             |   | I/P-O/P:3.75KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC   |            |            |       |
|              | ISOLATION RESISTANCE                          |   | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH  |            |            |       |
|              | EMC EMISSION                                  | <small>Note.7</small>   | Compliance to EN55015, EN61000-3-2 Class C (@load≥ 60%) ; EN61000-3-3, GB17743 and GB17625.1, EAC TP TC 020  |            |            |       |
|              | EMC IMMUNITY                                  |   | Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547,light industry level (surge immunity:Line-Earth:4KV,Line-Line:2KV), EAC TP TC 020  |            |            |       |
| OTHERS       | MTBF  |   | 985.6K hrs min.    Telcordia SR-332 (Bellcore);    300Khrs min.    MIL-HDBK-217F (25℃)   |            |            |       |
|              | DIMENSION                                     |   | φ 130mm *66.5mm (D * H)  |            |            |       |
|              | PACKING                                       |   | 1.18Kg; 12pcs/15.7Kg/1.43CUFT(Blank/A/B Type),1.89CUFT(E Type)   |            |            |       |
| NOTE         |   | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.<br>2. Please refer to "DRIVING METHODS OF LED MODULE".<br>3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.<br>4. Length of set up time is measured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time.<br>5. The DA type power supply is less efficient than the typical efficiency in specification by 1%.<br>6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.<br>7. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.<br>8. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is about 75℃ or less.<br>9. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a><br>10. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft) |  |            |            |       |

## ■ BLOCK DIAGRAM

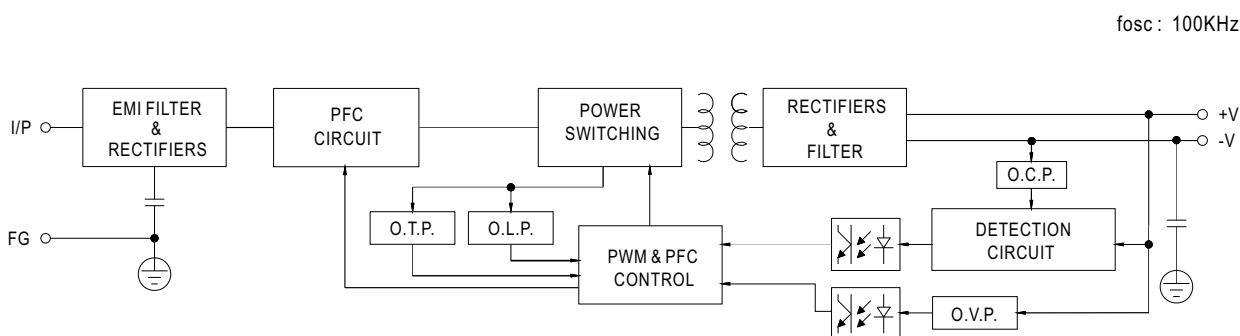

## ■ DRIVING METHODS OF LED MODULE


※ This series works in constant current mode to directly drive the LEDs.

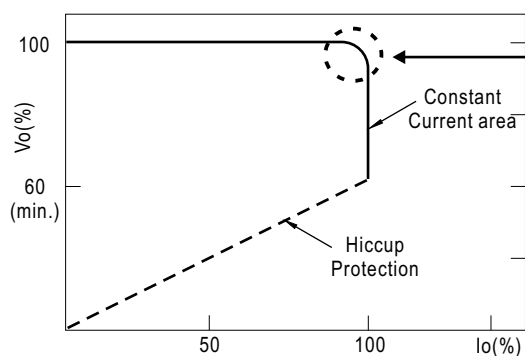

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.  
Should there be any compatibility issues, please contact MEAN WELL.



## DIMMING OPERATION

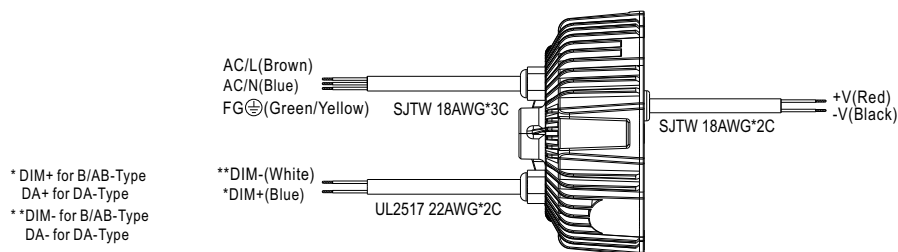



### ※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:  
1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 $\mu$ A (typ.)



#### ◎ Applying additive 1 ~ 10VDC

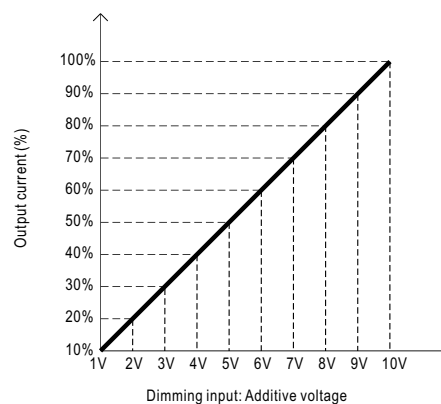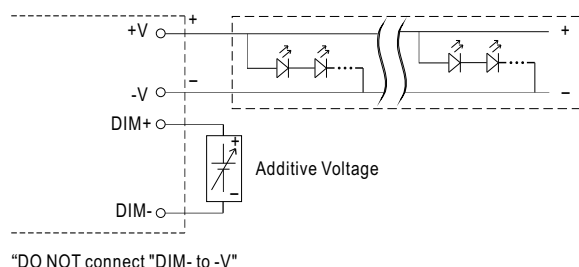

#### ◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

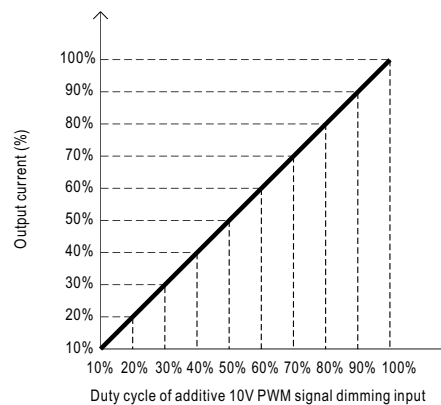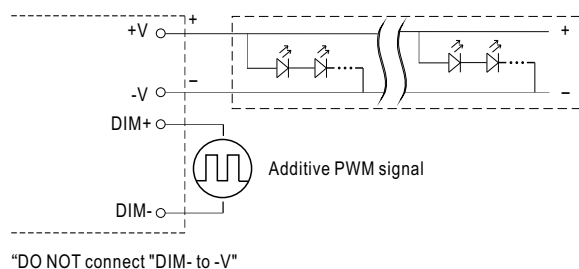


#### ◎ Applying additive resistance:

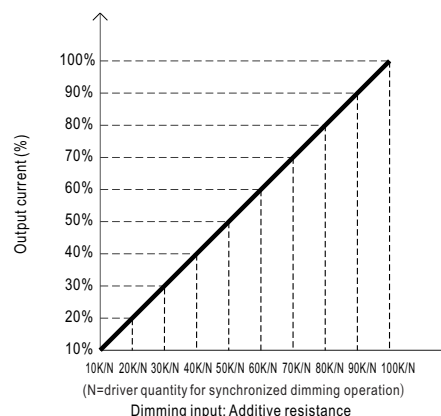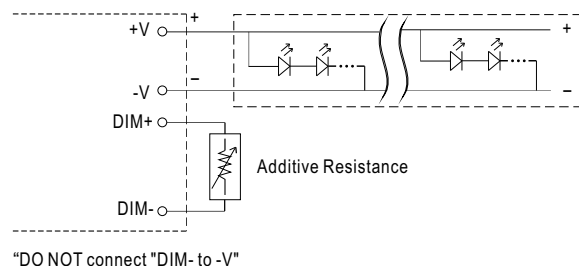



Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.


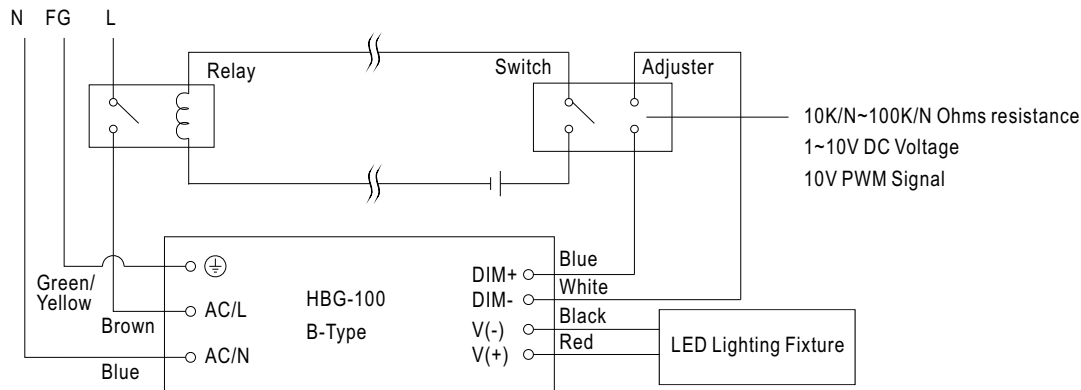


Using a switch and relay can turn ON/OFF the lighting fixture.


※ **DALI Interface (primary side; for DA-Type)**

- Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 8% of output.

■ **OUTPUT LOAD vs TEMPERATURE(Note.9)**

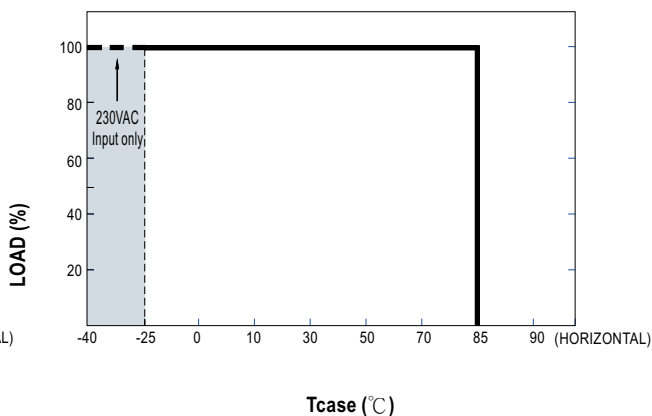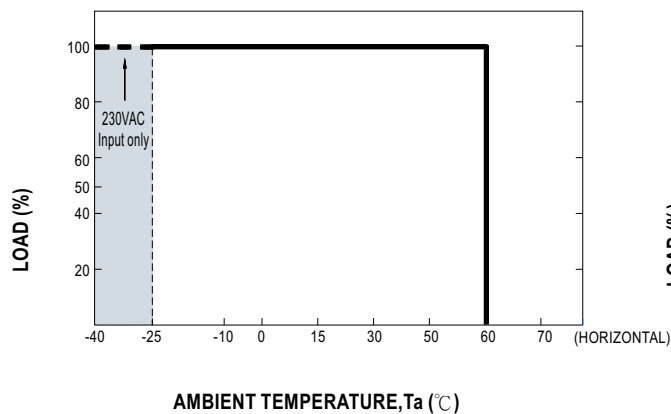


■ **STATIC CHARACTERISTIC**

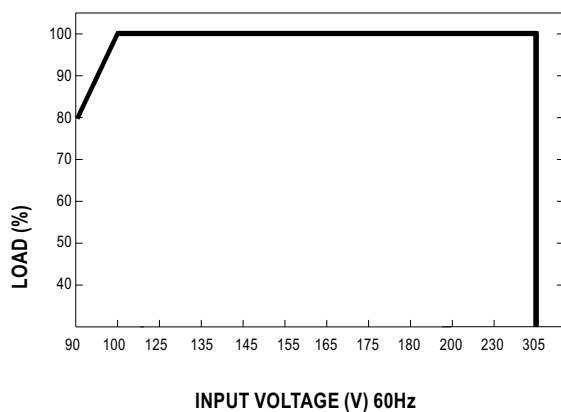

※ De-rating is needed under low input voltage.


■ **POWER FACTOR (PF) CHARACTERISTIC**

※  $T_{case}$  at 75°C

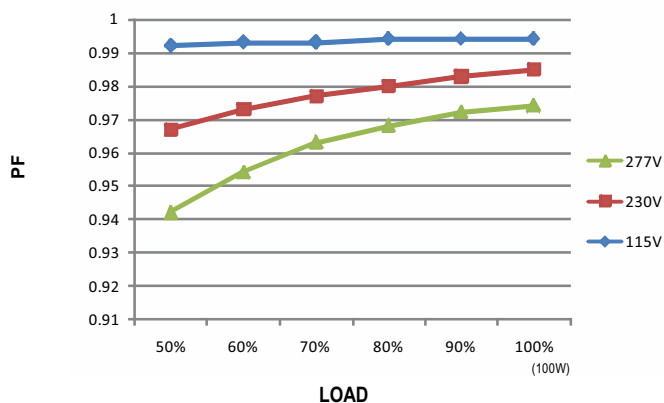

■ **TOTAL HARMONIC DISTORTION (THD)**


※ 48V Model,  $T_{case}$  at 75°C

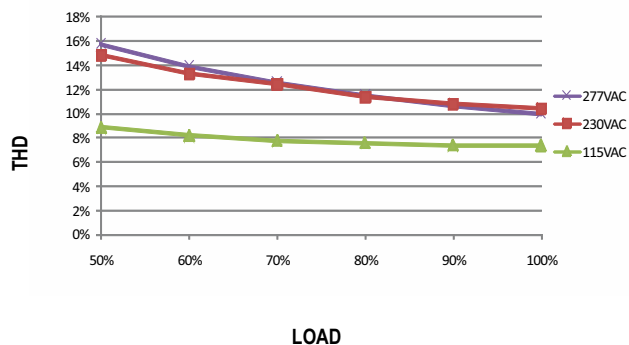


■ **EFFICIENCY vs LOAD**

HBG-100 series possess superior working efficiency that up to 91% can be reached in field applications.

※ 48V Model,  $T_{case}$  at 75°C

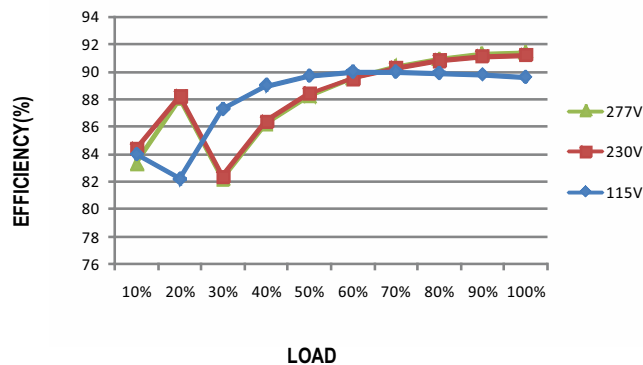


■ LIFE TIME

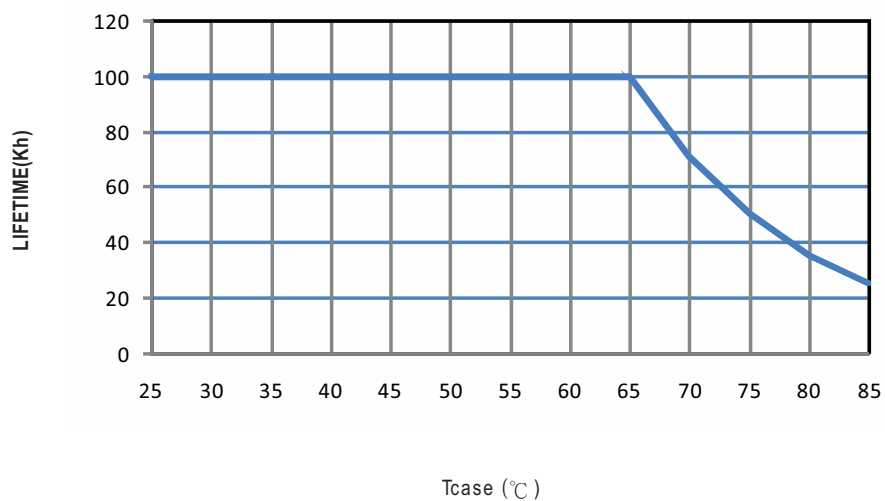


■ MECHANICAL SPECIFICATION

※ Blank-Type

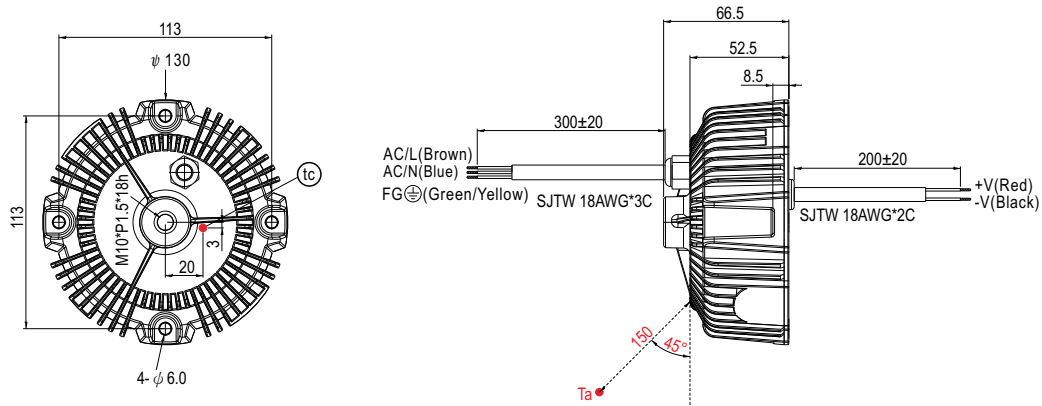


- (tc) : Max. Case Temperature. (case temperature measured point)
- Ta: Ambient Temperature measured point

※ A-Type

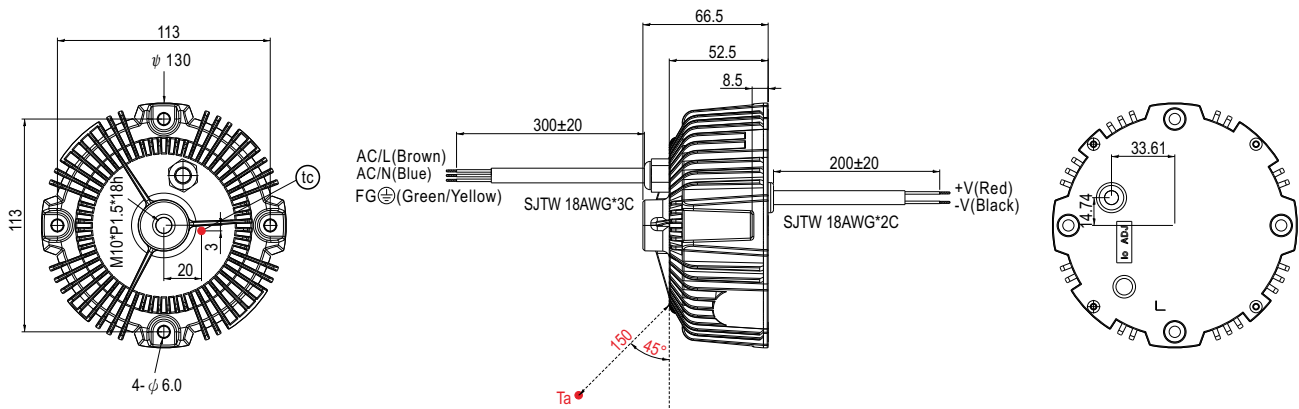


- (tc) : Max. Case Temperature. (case temperature measured point)
- Ta: Ambient Temperature measured point

※ B/DA-Type

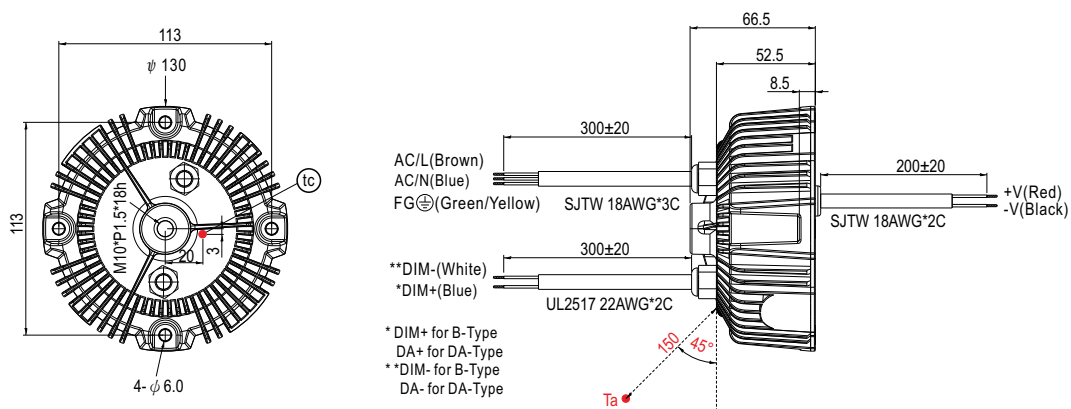

- (tc) : Max. Case Temperature. (case temperature measured point)
- Ta: Ambient Temperature measured point

※ AB-Type

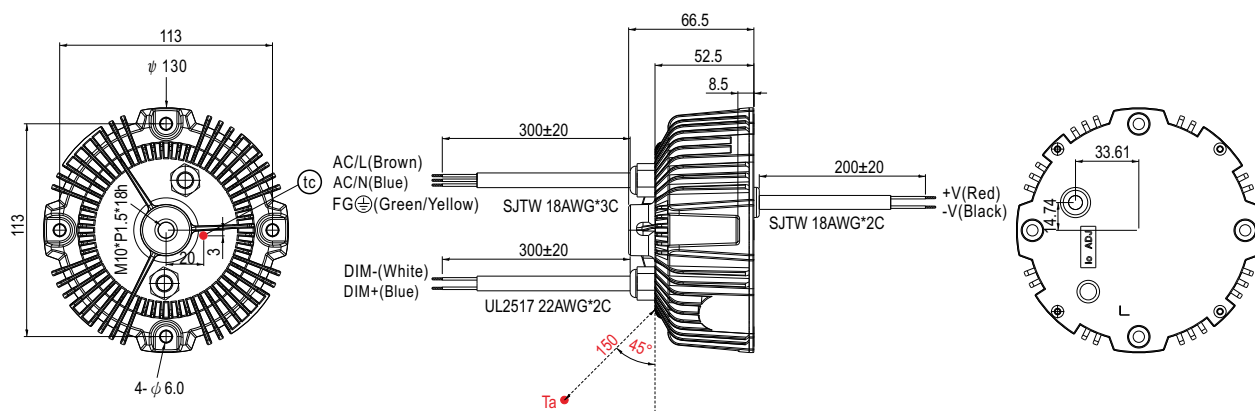

- $t_c$  : Max. Case Temperature.(case temperature measured point)
- $T_a$ : Ambient Temperature measured point

■ INSTALLATIONS



**Caution**

- Please inspect the appearance of the driver if the package is damaged. There should not be any cracks.
- Please do not drop or bump the driver.
- All screws including the suspension screw should be paired with a spring washer and locked tight.
- The entire luminaire, including the driver, should be limited to 10Kg or less.
- The luminaire should be cautiously protected from damage due to shock throughout packaging and transportation.
- Please thoroughly follow the preceding cautionary notes to prevent the luminaire from falling, leading to injuries.