
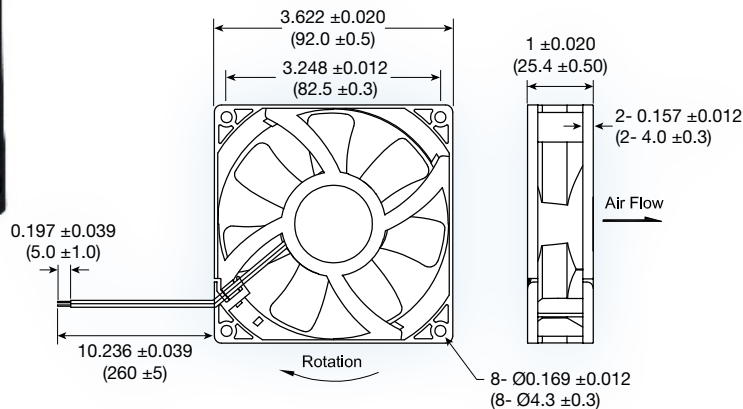


MR9225 series

**(92 x 92 x 25 mm)**

3.62 x 3.62 x 0.98 inches

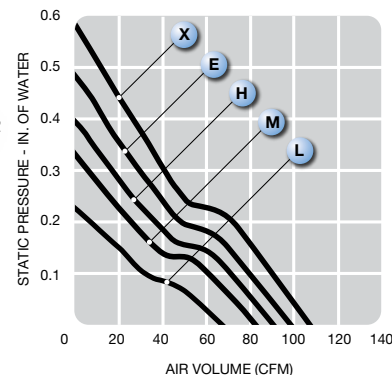

Features: soft start, polarity protection, auto-restart

Operating Voltage: 24 VDC

Construction: UL94V-0 plastic impeller and frame

Bearing option: ball bearing or sleeve

Air Flow: air exhaust over struts

Options: tachometer output or locked rotor alarm signal; PWM speed control

Model No.	Rated Voltage VDC	Current A 24	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dBa	Weight g
				M ³ /Min.	CFM	MM	INCH		
MR9225L	24	0.11	3,000	1.91	68	5.91	0.23	40.9	120
MR9225M	24	0.19	3,600	2.28	81	8.42	0.33	45.1	120
MR9225H	24	0.25	4,000	2.53	90	10.35	0.40	48.0	120
MR9225E	24	0.31	4,400	2.77	99	12.46	0.49	50.8	120
MR9225X	24	0.42	4,800	3.02	107	14.78	0.58	53.0	120