

UF13A series


(127 x 127 x 38 mm)

5.0 x 5.0 x 1.5 inches

Operating voltage: 115 or 230 VAC

 Construction: aluminum die cast frame;
UL94V-0 PBT impeller

 Bearing option: ball bearing or sintered bronze
sleeve




Motor: shaded pole

Air Flow: exhaust over struts

Connection: terminal or 22 AWG lead wire

Protection: impedance

Option: IP55; IP55 + salt fog

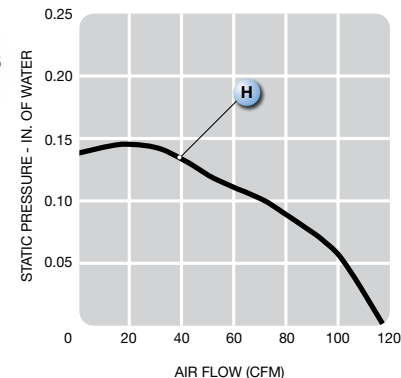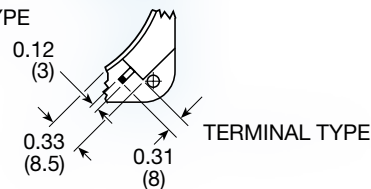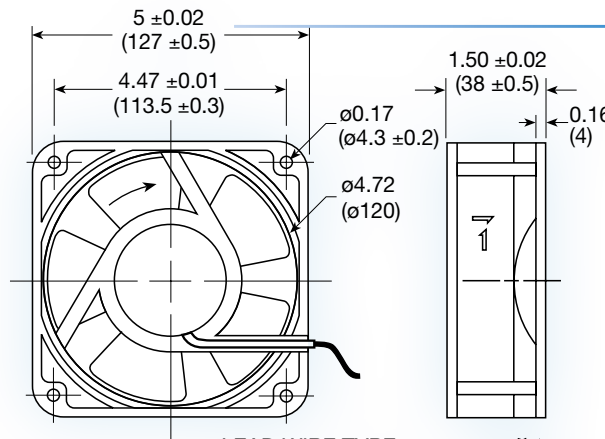

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF13A12-__H	115	60	12	0.16	0.23	3,000	3.4	120	3.5	0.14	50	0.55
UF13A23-__H	230	60	15	0.09	0.11	3,000	3.4	120	3.5	0.14	50	0.55