
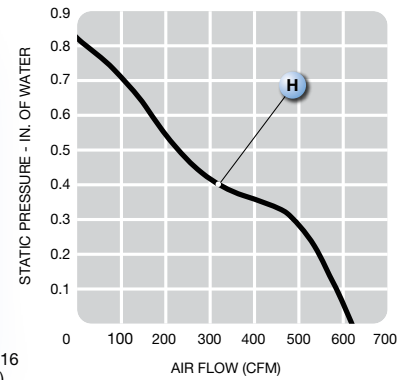


# UF200BMB-H2 series

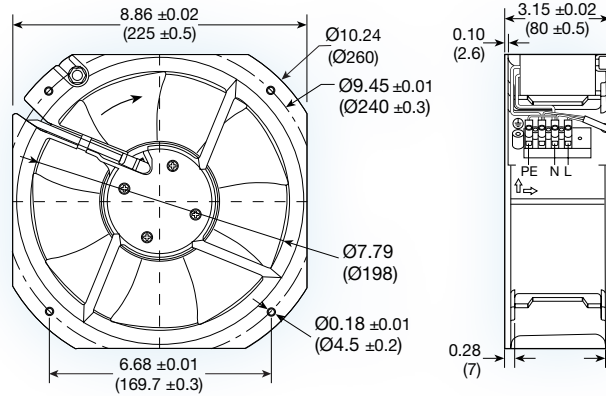

**(225 x 225 x 80 mm)**


8.86 x 8.86 x 3.15 inches

|                    |                                                |
|--------------------|------------------------------------------------|
| Features:          | <b>-20° ~ 70°C operating temperature range</b> |
| Operating voltage: | 115 or 230 VAC                                 |
| Construction:      | metal frame and impeller                       |
| Bearing option:    | ball bearing with high temp lubricant          |
| Motor:             | permanent split capacitor - Class F insulation |
| Air Flow:          | exhaust over struts                            |
| Connection:        | terminal                                       |
| Protection:        | thermal                                        |
| Option:            | tachometer output                              |

| Model No.     | Rated Voltage<br>V | Freq.<br>HZ | Input Power<br>W | Rated Cur.<br>A | Locked Cur.<br>A | Speed<br>RPM | Air Volume           |     | Max. Static Pressure (H <sub>2</sub> O) |      | Sound Noise<br>dba | Weight<br>kg |
|---------------|--------------------|-------------|------------------|-----------------|------------------|--------------|----------------------|-----|-----------------------------------------|------|--------------------|--------------|
|               |                    |             |                  |                 |                  |              | M <sup>3</sup> /Min. | CFM | MM                                      | INCH |                    |              |
| UF200BMB12-H2 | 115                | 60          | 100              | 0.88            | 1.31             | 3,000        | 17.7                 | 625 | 20.5                                    | 0.81 | 61                 | 1.40         |
| UF200BMB23-H2 | 230                | 60          | 80               | 0.37            | 0.61             | 3,000        | 17.7                 | 625 | 20.5                                    | 0.81 | 61                 | 1.40         |

## -H2C2B

(With Guard/No Frame)

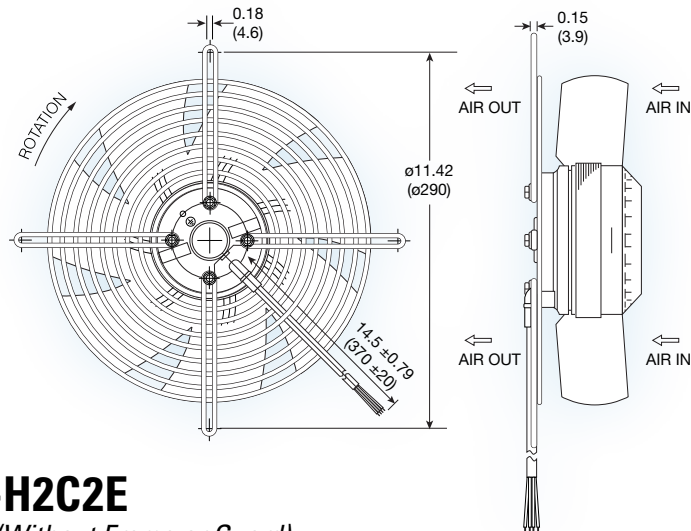

## -H2C2E

(Without Frame or Guard)

