


UF360AAA series

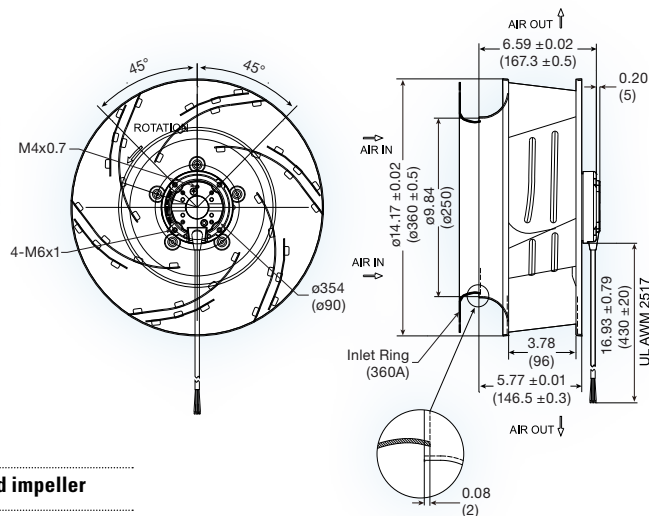

(360 dia. x 167.3 mm)

14.17 dia. x 6.59 inches

Features: backward curved impeller

Operating voltage: 115 or 230 VAC

Construction: aluminum die cast motor base, aluminum impeller


Bearing option: ball bearing

Motor: permanent split capacitor
required capacitor included

Air Flow: centrifugal

Connection: AWM 2517 lead wires

Option: tachometer output

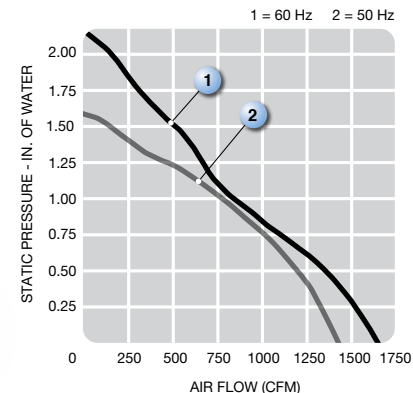

Model No.	Rated Voltage V	Freq. Hz	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dba	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF360AAA12-H1C4A	115	50	190	1.70	4.24	1,400	40.5	1430	40	1.6	66	5.1
	115	60	270	2.26	4.00	1,600	46.5	1645	55	2.2	70	5.1
UF360AAA23-H1C4A	230	50	190	0.85	2.12	1,400	40.5	1430	40	1.6	66	5.1
	230	60	265	1.13	2.00	1,600	46.5	1645	55	2.2	70	5.1