

















## Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class | design
- Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- · Function options: output adjustable via potentiometer; 3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty


# Applications

- LED street lighting
- · LED high-bay lighting
- Parking space lighting
- LED fishing lamp
- LED greenhouse lighting
- ${}^{\raisebox{3.5pt}{\text{\circle*{1.5}}}}$  Type "HL" for use in Class I , Division 2 hazardous (Classified) location.

# Description

HLG-120H series is a 120W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-120H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for  $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$  case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-120H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

# Model Encoding

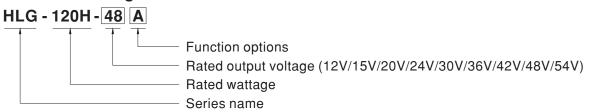

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request




## **SPECIFICATION**

MODEL		HLG-120H-12	HLG-120H-15	HLG-120H-20	HLG-120H-24	HLG-120H-30	HLG-120H-36	HLG-120H-42	HLG-120H-48	HLG-120H-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A
	RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
										P
OUTPUT	VOLTAGE ADJ. RANGE	Adjustable for A-Type only (via built-in potentiometer)								
		Adjustable for A-Type only (via built-in potentiometer)								
	CURRENT ADJ. RANGE	5 ~ 10A	4 ~ 8A	3 ~ 6A	2.5 ~ 5A	2 ~ 4A	1.7 ~ 3.4A	1.4 ~ 2.9A	1.2 ~ 2.5A	1.1 ~ 2.3A
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±2.0%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
		1200ms,50m		00ms,50ms/2		= 0.070	_ = 0.070	_ 5.570	= 0.070	
	HOLD UP TIME (Typ.)	12ms / 115VAC, 230VAC								
	TIOLD OF TIME (Typ.)									
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE									
	FREQUENCT RANGE	47 ~ 63Hz	DE>0.0	E/220VAC DE	>0.02/277\/A	C @ full load				
	POWER FACTOR (Typ.)	PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.93/277VAC @ full load								
		(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)  THD< 20% (@ load≥50% / 115VAC,230VAC; @ load≥75% / 277VAC)								
	TOTAL HARMONIC DISTORTION		•				<b>(</b> )			
INPUT	EFFICIENCY (T)	,		ARMONIC DIS	· ·	· · · · ·	000/	000/	00.50/	00.50/
	EFFICIENCY (Typ.)	92%	92%	93%	93%	93%	93%	93%	93.5%	93.5%
	AC CURRENT (Typ.)	1.4A / 115VA			.55A / 277VAC		-NAA 440			
	INRUSH CURRENT (Typ.)	COLD START	60A(twidth=375	us measured a	t 50% Ipeak) at 1	230VAC; Per NE	EMA 410			
	MAX. No. of PSUs on 16A	5 units (circui	t breaker of typ	oe B) / 9 units	(circuit breaker	of type C) at 2	30VAC			
	CIRCUIT BREAKER	`	5 units (circuit breaker of type B) / 9 units (circuit breaker of type C) at 230VAC							
	LEAKAGE CURRENT	<0.75mA / 277VAC								
	OVER CURRENT	95 ~ 108%								
		Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Constant curi	ent limiting, re	covers automa	tically after fau	Ilt condition is r	emoved			
PROTECTION	OVER VOLTAGE	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V
	OVER VOLIAGE	Shut down o/p voltage with auto-recovery or re-power on to recovery								
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down								
	WORKING TEMP.	Tcase= -40 ~	+80°C (Pleas	e refer to "OU"	TPUT LOAD v	s TEMPERATU	JRE" section)			
	MAX. CASE TEMP.	Tcase= +80°C								
ENVIDONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/C (0~60°C)								
	VIBRATION	10 ~ 500Hz, 5	G 12min./1cyc	cle, period for	72min. each al	ong X, Y, Z axe	S			
	SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No. 250.0-08, EN/AS/NZS 61347-1, EN/AS/NZS 61347-2-13 independent; GB19510.1,								
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC								
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
		-				ass C (@ load≧	50%) · FN6100	0-3-3 GR177//3	and GR17625.1	FAC TP TC 0
		·				ight industry leve	,			
	EMC IMMUNITY MTBF					,	, ,	·	v, Lille-Lille ZKV)	, EAC IF IC U
OTHERS		559.5K hrs min. Telcordia SR-332 (Bellcore); 167.1Khrs min. MIL-HDBK-217F (25°C)   220*68*38.8mm (L*W*H)								
	DIMENSION	1.12Kg; 12pcs/14.4Kg/0.8CUFT								
	PACKING	0. 1								
IOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>Please refer to "DRIVING METHODS OF LED MODULE".</li> </ol>									
	<ol> <li>De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</li> <li>Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</li> <li>The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</li> <li>To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.</li> </ol>							y the		
	9. This series meets the typic 10. Please refer to the warrant 11. The ambient temperature of	ty statement o	n MEAN WEL	L's website at	http://www.me	anwell.com				




## **■** BLOCK DIAGRAM

Fosc: 100KHz

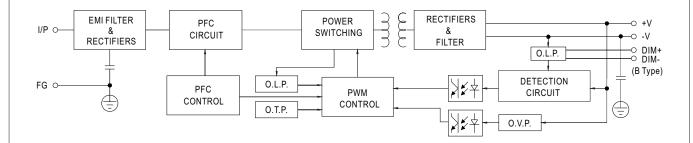

## ■ DRIVING METHODS OF LED MODULE

\* This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

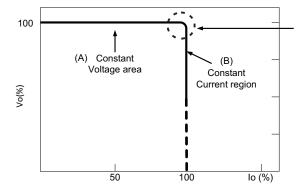


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.









#### \* 3 in 1 dimming function (for B-Type)

- · Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
  - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC

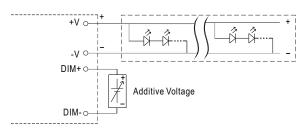


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

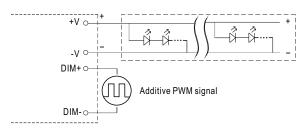



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

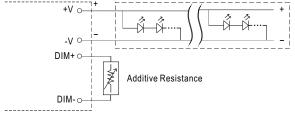

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

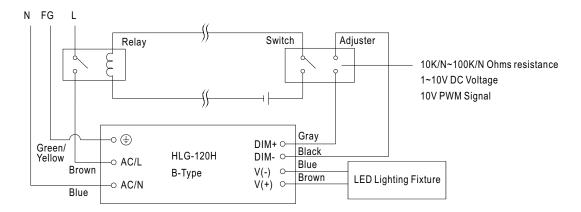

Using a switch and relay can turn ON/OFF the lighting fixture.




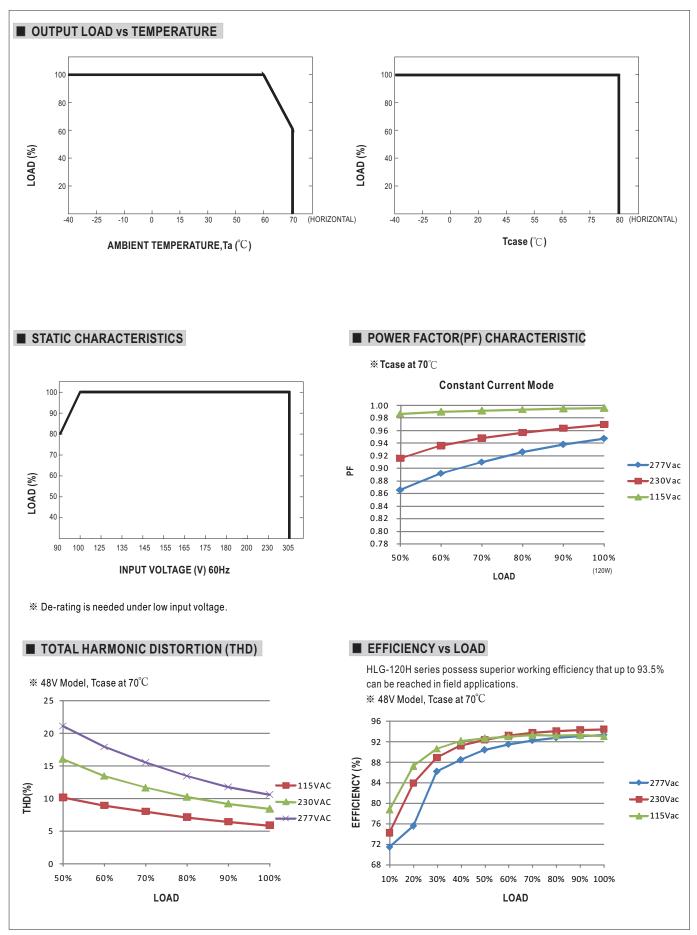


File Name:HLG-120H-SPEC 2018-05-02



# ■ LIFE TIME

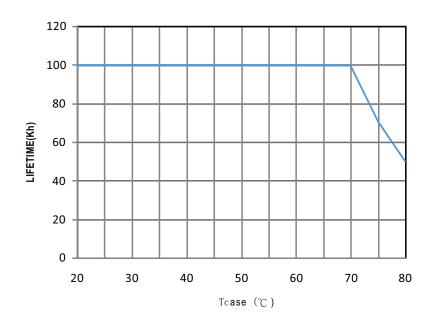



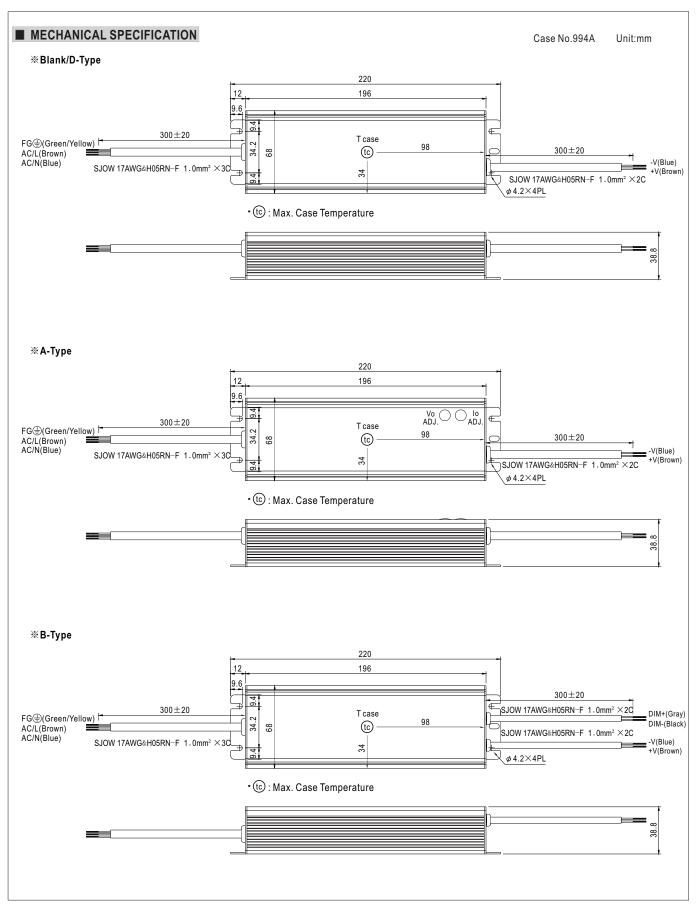


File Name:HLG-120H-SPEC 2018-05-02



## **■** WATERPROOF CONNECTION


#### **\* Waterproof connector**

Waterproof connector can be assembled on the output cable of HLG-120H to operate in dry/wet/damp or outdoor environment.

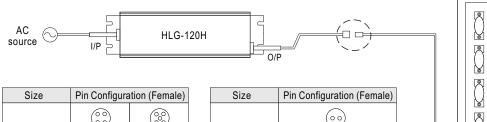


Size	Pin Configuration (Female)			
M12	000	000		
IVI I Z	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)			
M15	00			
IVITO	2-PIN			
	12A/PIN			
Order No.	M15-02			
Suitable Current	12A max.			




#### **X** Cable Joiner

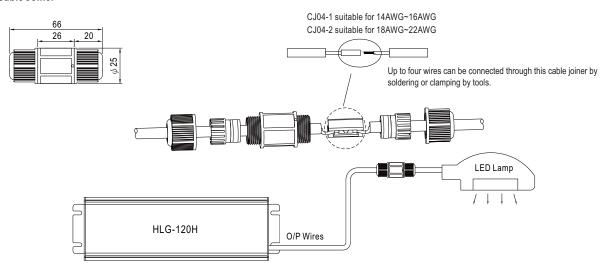

O CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

## **X** Junction Box Option

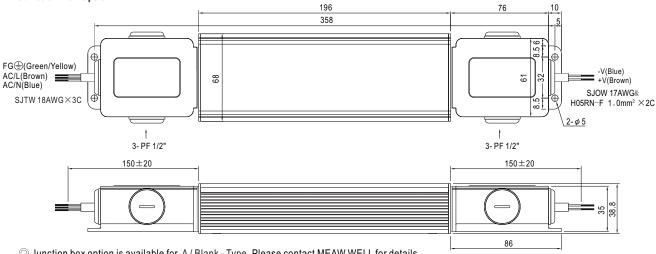

O Junction box option is available for A/Blank - Type. Please contact MEAW WELL for details.

## ■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html